

LUXUS

Folding Arm Awning



AWNING
REPUBLIC

LUXUS

The premium folding arm awning that combines European design and technology to provide exemplary performance and durability.

Suitable for residential and commercial settings with easy, streamline installation options.



Fully closing cassette protects the awnings' working parts and fabric from the harsh Australian climate.

Manual crank handle or remote control motor operation enables effortless operation to protect from the elements. Smart operation is also available.

4 cables within high-quality aluminium arms with high-strength drop-forged cast parts ensures a greater flexibility to wind gusts and a overall higher wind rating.

A wide selection of premium acrylic canvas and frame powdercoating options available.

Available in a variety of widths, projections and installation angles.

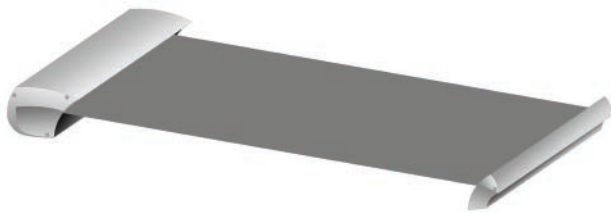

Luxus

Open Awning Dimensions	
Minimum Width	3000 mm
Maximum Width	8000 mm
Minimum Projection	1500 mm
Maximum Projection	4000 mm
Installation Angle	5 - 40 degrees
Closed Awning Dimensions	
Side Width	268 mm
Side Height	180 mm




Compact Closed Cassette



4 Cable Arm System



Crank Handle or Motor Operation

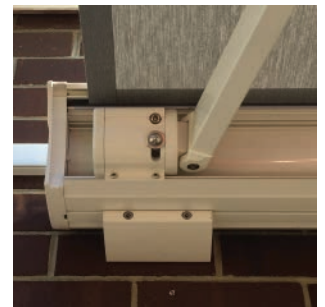


Easy Wall and Roof Mounting Options

Fabric and Frame Colour Options



Over 200 Fabric Colours and Patterns Available



Over 100 Frame Colours Available



Unit 12/108 Welshpool Road, Welshpool, WA

6106 (08) 9361 2728

www.awningrepublic.com.au


sales@awningrepublic.com.au




AWNING
REPUBLIC

LUXUS


Awning Mounting Situations

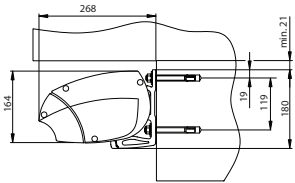


Face Mount 5° - 40° (150mm)

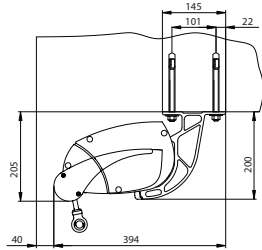

Top Mount 5° - 40°

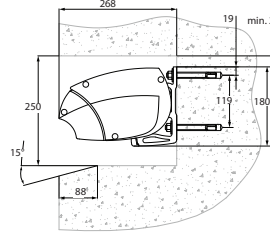


Fully Recessed

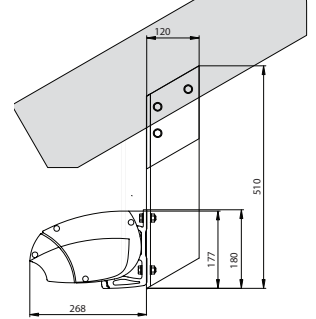


Rafter Mount


System Height for Standard 15° Slope

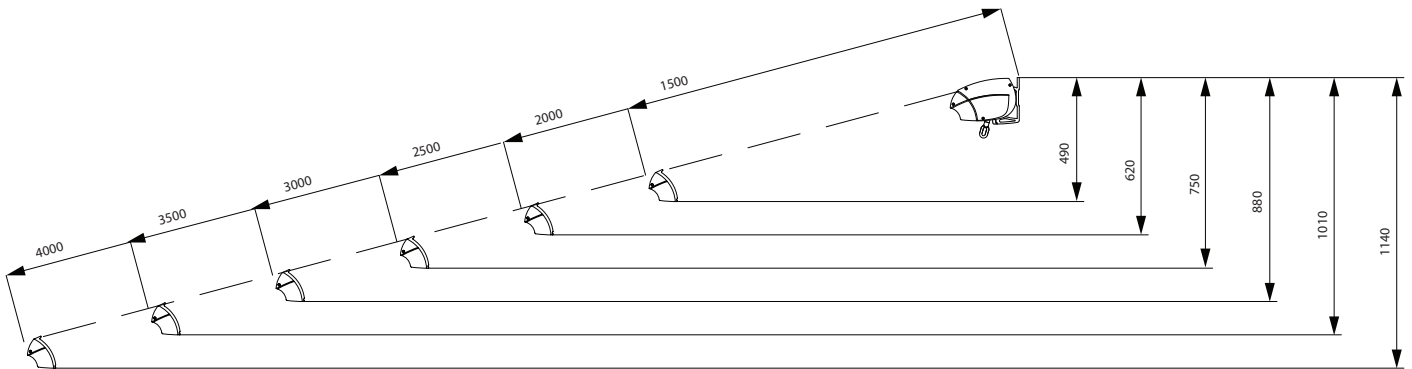


Alternative Awning Mounting Situations

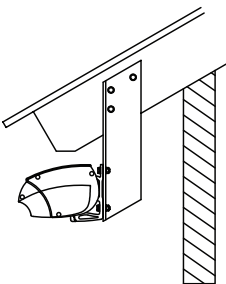


Exposed Rafter

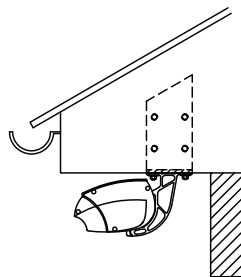

Soffit / Under Eaves

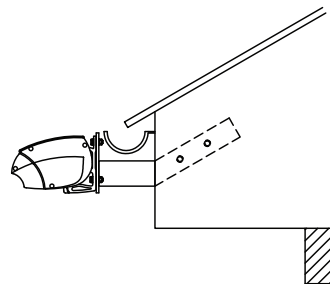

Fascia Bracket

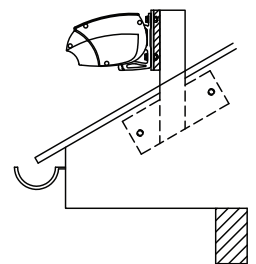

Roof Mount